

PATHFINDER I LED Outdoor Wall Mount

52122 / 52122PCH

- Aluminum & Acrylic
- 3000K Color Temperature
- CRI 80
- Dimmable with ELV dimmers at 120V
- Wet Location
- 120-277V input
- Photocell option available

Job Name : _____
 Job Type : _____
 Quantity : _____
 Comments : _____



PRODUCT DESCRIPTION

With solid Die-Cast Aluminum construction and powered by a range voltage input driver, Pathfinder is a high performance down light for commercial and residential installations. Choose from triangular or spherical profiles as they discreetly extend from the wall. Available with a photocell option, these archetypal forms purposely blend into the architectural landscape creating safer spaces that shine light on locations of interest. Available in Black, Architectural Bronze, or Metallic Silver

- Always consult a qualified electrician before installing any lighting product
- Installation Requirements:
 Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding at least 35 lbs

FINISHES OPTION

-  Architectural Bronze
-  Black
-  Silver

MATERIAL

Aluminum + Acrylic

RATINGS

cETLus
 Wet Location
 For Outdoor
 ADA



ADDITIONAL

INSTALL UP/DOWN: Down
 RATED LIFE 50000 Hours
 OPERATING TEMPERATURE:
 -20°C (-4°F), 40°C (104°F)


PHOTOMETRIC: Report Found Online

MEASUREMENTS

DIMENSION : 7" W x 4.5" H x 3.5" Ext
 BACK PLATE : 2.25" HCO
 HANGING WEIGHT : 1.51 lb

LAMPING

INPUT VOLTAGE : 120-277V
 LUMENS : 880 Rated (820 Del.)
 BULB : 1 x 15W LED PCB Integrated , 15W Total
 BULB INCLUDED : (Integrated)
 DIMMABLE : Only at 120V with ELV
 CRI : 80 CRI
 COLOR_TEMP : 3000K

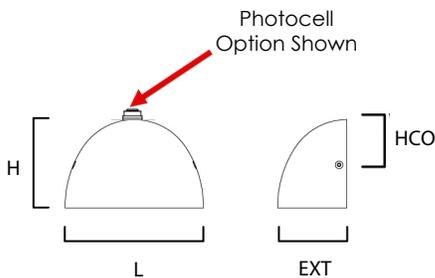

WESTERN DISTRIBUTION CENTER (HEADQUARTER)
 253 NORTH VINELAND AVE | CITY OF INDUSTRY, CA 91746
EASTERN DISTRIBUTION CENTER
 101 GARDNER PARK | PEACHTREE CITY, GA 30269
 P. 626.956.4200 | F. 626.956.4225 | maximlighting.com