

WRAP LED | 4' LED CEILING WRAP

57521 / 57522 / 57523

- Surface Mountable LED Wrap
- PMMA Acrylic Diffuser
- Dimmable with CL Triac dimmer
- Damp Location Rated
- L70 Project Life of 50,000 Hours
- Color Temperatures of 3000k/4000k
- Suitable for Closets according to NEC Section 410.8 & 410.16
- CRI 90+
- Energy Star
- Title 24 JA8 Compliant


Job Name : _____
 Job Type : _____
 Quantity : _____
 Comments : _____



57521 / 57522




57523

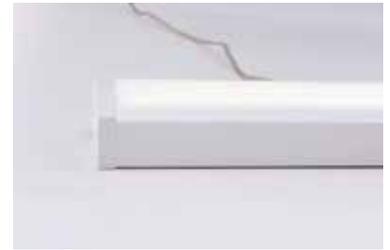

PRODUCT DESCRIPTION

The classic Wrap Around is updated with more efficient and uniformly lit LED technology. Safer than harmful fluorescent lighting and longer lasting as well. Meeting today's Energy Star and Title 24 requirements, this product is fully dimmable and achieves a color rendering over 90 without sacrificing light output.

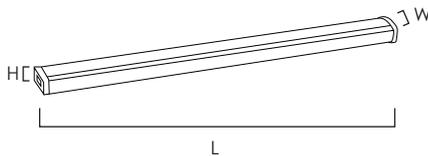

MEASUREMENTS

MODEL	DIMENSION
57521	48"L x 4"W x 4.5"H
57522	48"L x 4"W x 4.5"H
57523	48"L x 7"W x 2.5"H

LAMPING

MODEL	BULB TYPE	CRI	LUMENS RATED	DEL	COL TEMP.	DIMMABLE	INPUT
57521	40W PCB LED (Integrated)	90+	3800	3230	4000K	Triac CL	120V
57522	40W PCB LED (Integrated)	90+	3800	3230	3000K	Triac CL	120V
57523	40W PCB LED (Integrated)	90+	4200	4000	4000K		120V

FINISH:

White (WT)



MATERIALS:

Acrylic + Steel

RATINGS:

ETL/cETL
 Damp Location
 Energy Star
 Title 24 JA8 Compliant
 Closets Rated: 410.8 & 410.16



ADDITIONAL:

RATED LIFE: 50,000 Hours

Always consult a qualified electrician before installing any lighting product



WESTERN DISTRIBUTION CENTER (HEADQUARTER)

253 NORTH VINELAND AVE | CITY OF INDUSTRY, CA 91746

EASTERN DISTRIBUTION CENTER

101 GARDNER PARK | PEACHTREE CITY, GA 30269

P. 626.956.4200 | F. 626.956.4225 | maximlighting.com