


PRODUCT DESCRIPTION

Step and pathway lighting suitable for interior or exterior application. Designed to install into a single gang box and is line voltage so additional transformers are not needed. Available in Aluminum, White, Black, or Bronze and both horizontal wide beam or vertical narrow beam spread.

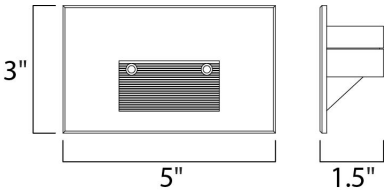


MEASUREMENTS

DIMENSION : 5" W x 3" H x 1.5" Ext
 MAX OAH : 3" W x 5" H
 HANGING WEIGHT : 0.77 lb

LAMPING

INPUT VOLTAGE : 120V
 LUMENS : 280 Rated (112 Del.)
 BULB : 1 x 4W LED PCB Integrated , 4W Total
 BULB INCLUDED : (Integrated)
 DIMMABLE : No
 CRI : 80+ CRI
 COLOR_TEMP : 3000K
 LIGHTING_DIRECTION : Down

FINISHES OPTION



MATERIAL

Aluminum

RATINGS

cETLus
 Wet Location
 For Outdoor



ADDITIONAL

INSTALL UP/DOWN: Up
 RATED LIFE 50000 Hours
 OPERATING TEMPERATURE:
 -20°C (-4°F), 40°C (104°F)

PHOTOMETRIC: Report Found Online

Always consult a qualified electrician before installing any lighting product.



WESTERN DISTRIBUTION CENTER (HEADQUARTER)
 253 NORTH VINELAND AVE | CITY OF INDUSTRY, CA 91746

EASTERN DISTRIBUTION CENTER
 4200 SHIRLEY DR. | ATLANTA, GA 30336

P. 626.956.4200 | F. 626.956.4225 | maximlighting.com