WAFER 0-10V | LED SURFACE MOUNT

57715 | 58711 | 58713 | 58715 | 58737 | *58780 | *58784

- Range Voltage Input 120-277V
- Die Cast Aluminum frame
- Edge Lit LED technology
- Energy Star and T24 Options
- Patented Driver WO2022166960A1 Installation on select models
- For Dimmer information: See Dimming Compatibility Chart

Job Name	:
Job Type	:
Quantity	:
Comments	<u> </u>






58780WT 7" Empty Shell



*58784WTWT Wafer LED 7" Emergency Back Up

PRODUCT DESCRIPTION

Wafer was designed for the discriminate consumer who wants the low profile look of recessed without the high cost. Manufactured of die cast aluminum, Wafer brings ultimate heat dissipation to its edge lit technology. Edge lighting gives very even light distribution while dispersing heat over a larger area. The result of this is longer LED life and better light diffusion.

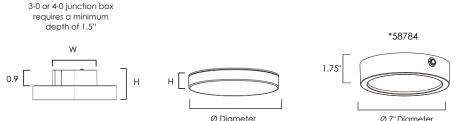

dopin of 1.5		*58784		
0.9 H	H Ø Diameter	1.75" © 7" Diameter		

MEASUREMENTS	LAMPING							
MODEL DIMENSION	BULB TYPE	ССТ	CRI		MENS DELIVERED	DIMMABLE	V INPUT	
58711 5.5"Ø x 0.5"H 58713 7"Ø x 0.5"H 58715 9"Ø x 0.5"H 57715 10"Ø x 0.5"H 58737 15"Ø x 0.5"H	10W Integrated LED 15W Integrated LED 20W Integrated LED 20W Integrated LED 30W Integrated LED 17W Integrated LED	3000K 3000K 3000K 3000K 4000K 3000K	90+ 90+ 90+ 90+ 90+ 90+	750 1250 2000 1200 3000 1250	640 1100 1600 1200 2500 1150	0-10V 0-10V 0-10V 0-10V 0-10V	120-277V 120-277V 120-277V 120-277V 120-277V	

*EMERGENCY BACK UP MODEL. MINIMUM 15 HOURS FOR FULL CHARGE. LASTS 1.5 HOURS ON BATTERY

FINISHES OPTIONS:

White (WT)

Satin Nickel (SN)

MATERIAL:

Aluminum Polycarbonate Lens

AVAILABLE SIZES: *NOMINAL 5" | 7" | 9" | 10" | 15"

RATINGS:

cETLus Wet Location Energy Star 2.0 Title 24 JA8 Compliant ADA extension Dimmable









ADDITIONAL:

RATED LIFE: 50,000 Hours OPERATING TEMP: -20° C (-4°), 40°C (104°F) PHOTOMETRIC: Reports Available Patented Technology: WO2022166960A1 in 9" and above

Always consult a qualified electrician before installing any lighting product

