

CORONA BASIC | FANDELIER

60002SN

- 80+ CRI
- LED 3000K
- Dimmable
- Damp Location
- 1 x 6" Downrod included
- Wall mountable Control


Job Name : _____
 Job Type : _____
 Quantity : _____
 Comments : _____

FCT6100WT (Included)
 AC Wall Control,
 Light Dimming and
 Fan Control



PRODUCT DESCRIPTION

Fandelight has a transitional look, featuring a minimalistic frame finished in Satin Nickel with a downward directed ring of LED illumination. The remote provided can be hand held or placed in magnetic wallmount.

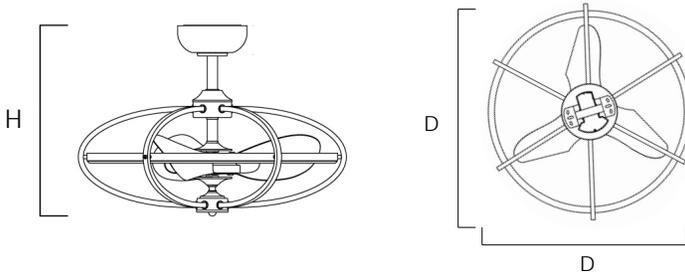

ITEM#	LAMPING	DIMENSIONS	LUMENS RATED DEL	WEIGHT	BLADES	BLADE PTICH
60002	120V, 46W LED 3000K	D27.25" X 19.5"H	3200 1990	25.35 lb	(3) x ABS (Included)	12

Energy Information at High Speeds		
AIRFLOW CFM	AIRFLOW EFFICIENCY	ELECTRICITY USE
5057 CFM	158.2 CFM / W	31.9W

ENERGYGUIDE

Estimated
Yearly Energy Cost

\$6

Cost Range of Similar Models (19" - 84")

\$3 | | | \$34

• Based on 12 cents per kWh and 6.4 hours use per day
 • Your cost depends on rates and use
 • Energy Use 31.9 Watts

Airflow

5057

Cubic Feet Per Minute

• The higher the airflow, the more air the fan will move
 • Airflow Efficiency: 158.2 Cubic Feet Per Minute Per Watt

All estimates based on typical use, excluding lights fct.energy

FINISHES:
SATIN NICKEL (SN)

MATERIAL
 Steel
 Glass
 ABS Blades

RATINGS:
 ETL cETL
 Damp Location



FAN RODS: (SOLD SEPARATELY)

- 12" (FRD18)
- 18" (FRD24)
- 24" (FRD30)
- 36" (FRD36)
- 48" (FRD48)
- 60" (FRD60)
- 72" (FRD72)

ADDITIONAL:

RATED LIFE: 35,000 Hours
 OPERATING TEMP:
 -20°C (-4°F), 40°C (104°F)



WESTERN DISTRIBUTION CENTER (HEADQUARTER)
 253 NORTH VINELAND AVE | CITY OF INDUSTRY, CA 91746

EASTERN DISTRIBUTION CENTER
 101 GARDNER PARK | PEACHTREE CITY, GA 30269

P. 626.956.4200 | F. 626.956.4225 | maximlighting.com