

COUNTER I CHANDELIER W/ FAN

60003SN

- ETL/cETL
- Title 20 listed
- LED 3000K
- Suitable for Dry location
- Wall mountable (remote control included)

Job Name : _____
Job Type : _____
Quantity : _____
Comments : _____



ACCESSORIES (Sold Separately)



FCT6000WT

Wall Control

PRODUCT DESCRIPTION

The Counter Chandelier with fan is functional art at its finest. Bold, sleek and contemporary, the Counter is sure to be the focal point of any kitchen or living area. The fan blades, contained within a cage of four steel curved bars with LED integrated light strips, silently circulate the air at the speed of your preference. The Counter offers modern aviation appeal, solid construction, and a beautiful Satin Nickel finish.

- Always consult a qualified electrician before installing any lighting product
- Installation Requirements:
Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding at least 35 lbs

MEASUREMENTS


DIMENSIONS : 34.5"D x 18.25"H
CANOPY : 7"D x 2.75"H
HANGING WEIGHT : 15.93 lb
BLADE : 3 Blades with 22" span
BLADE PITCH : Varying
BLADE TO CEILING : 11"H

LAMPING

INPUT VOLTAGE : 120V
LUMENS : 9315 Rated (3640 Del.)
BULB : 56W PCB LED (Integrated)
DIMMABLE : Yes
CRI : 80+
COLOR TEMP : 3000K
MOTOR TYPE : DC Motor

AIRFLOW

SPEEDS : 6
AIRFLOW CFM : 5057
ELECTRICITY USE : 31.90W
AIRFLOW EFFICIENCY: 158.5

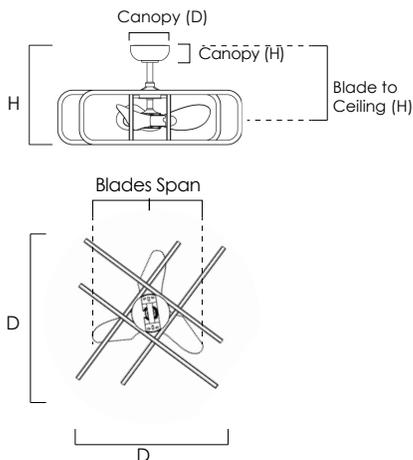

FINISHES OPTIONS:

Satin Nickel (SN)



MATERIAL:

Steel
Aluminum
Polypropelene Fan Blades

INCLUDES

- Wall Mountable Remote Control
- 1 x 8" Downrod

DOWNROD OPTIONS

- 18" (FRD0118SN)
- 24" (FRD0124SN)
- 30" (FRD0130SN)
- 36" (FRD0136SN)

RATINGS:

ETL cETL
Dry Location
Title 20



ADDITIONAL:

RATED LIFE: 35,000 Hours
OPERATING TEMP: -20° C (-4°), 40° C (104° F)
LIGHTING DIRECTION: Up



WESTERN DISTRIBUTION CENTER (HEADQUARTER)

253 NORTH VINELAND AVE | CITY OF INDUSTRY, CA 91746

EASTERN DISTRIBUTION CENTER

4200 SHIRLEY DR. | ATLANTA, GA 30336

P. 626.956.4200 | F. 626.956.4225 | maximlighting.com