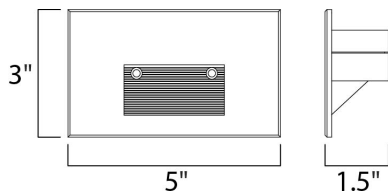


**PRODUCT DESCRIPTION**


Step and pathway lighting suitable for interior or exterior application. Designed to install into a single gang box and is line voltage so additional transformers are not needed. Available in Aluminum, White, Black, or Bronze and both horizontal wide beam or vertical narrow beam spread.

**MEASUREMENTS**

DIMENSION : 5" W x 3" H x 1.5" Ext  
MAX OAH : 3" W x 5" H  
HANGING WEIGHT : 0.77 lb

**LAMPING**

INPUT VOLTAGE : 120V  
LUMENS : 280 Rated (112 Del.)  
BULB : 1 x 4W LED PCB Integrated , 4W Total  
BULB INCLUDED : (Integrated)  
DIMMABLE : No  
CRI : 80+ CRI  
COLOR\_TEMP : 3000K  
LIGHTING\_DIRECTION : Down

**FINISHES OPTION****MATERIAL**

Aluminum

**RATINGS**

cETLus  
Wet Location

**ADDITIONAL**

INSTALL UP/DOWN: Up  
RATED LIFE 50000 Hours  
OPERATING TEMPERATURE:  
-20°C (-4°F), 40°C (104°F)

PHOTOMETRIC: Report Found Online

Always consult a qualified electrician before installing any lighting product.



WESTERN DISTRIBUTION CENTER (HEADQUARTER)  
253 NORTH VINELAND AVE | CITY OF INDUSTRY, CA 91746

EASTERN DISTRIBUTION CENTER  
101 GARDNER PARK | PEACHTREE CITY, GA 30269

P. 626.956.4200 | F. 626.956.4225 | maximlighting.com